

FAG



FAG Detector III – The solution for monitoring and balancing

Technical Product Information

SCHAEFFLER GROUP
INDUSTRIAL


Principle • Operation

Condition-based maintenance

Condition-based maintenance means: identifying damage at an early stage, defining planned repairs, making optimum use of bearing life, and achieving considerable reductions in costs. FAG Detector III fulfils these tasks to an optimum degree and is also highly suitable for users with little knowledge of vibration technology.

Preventing plant downtime

There are many different reasons for unplanned downtime of machinery. However, a not inconsiderable percentage can be attributed, directly or indirectly, to imbalance or misalignment. During operation, imbalance can generate considerable vibrations that lead to secondary damage such as premature bearing wear or fatigue fractures. This results in machine failure and thus unplanned production shutdowns. FAG Detector III is a tool that can be used to not only identify but also easily and efficiently eliminate such conditions.

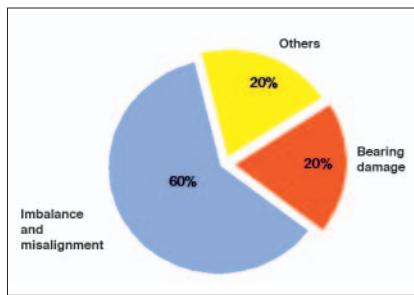

Reasons for unplanned downtime

High functionality – Simple handling

FAG Detector III is an offline vibration monitoring system, data collector and operational balancing device all in one. By means of various sensors, it can record the vibrations, temperatures and speeds of machinery. Step by step, the device's software guides the user through the measurement and balancing procedure. The user-friendly software Trendline then allows easy and effective data analysis. Furthermore, comments can be defined in the software, transferred to the FAG Detector III and selected as required after measurement. Any incipient damage can thus be detected at a very early

stage. As a result, maintenance can be planned and machine availability can be increased.

FAG Detector III is the ideal entry level device into the world of offline plant monitoring.

Advantages of the system

- Parallel monitoring of vibration and temperature
- Static and dynamic balancing on site
- Rapid and clear identification of measuring points by means of RFID technology
- Wide range of options for analysis and presentation
- Simple and easy to use
- Excellent price/performance ratio



Areas of application • Measurement

Areas of application

Machine vibrations are a good indicator for the condition of a machine. FAG Detector III can be used to monitor machine vibrations according to ISO 10816 and the condition of rolling bearings by means of the demodulated signal detection method.

FAG Detector III is thus a highly suitable device for the detection of

- imbalance and misalignment
- rolling bearing damage
- gearbox damage (tooth sets)

- pumps
- electric motors
- fans
- machine tools
- compressors
- gearboxes
- spindles
- etc.

Measurement and analysis of machine condition


FAG Detector III picks up vibration signals at predetermined measuring points and calculates the RMS values for vibration velocity, vibration acceleration and the demodulation. These characteristic values describe the condition of the machine and component and are presented in greater detail in the table on page 6.

The sensor should be positioned as close as possible to the point to be measured. In general, it is attached to the machine by means of the screw-mounted magnetic foot.

For the measurement procedure, the user selects either this measurement location in the configuration system of FAG Detector III or the Detector III identifies the measuring point automatically by means of RFID. Measurement is then started. At the beginning the speed is measured, which should be constant during measurement (at least 40 rpm or, in the case of ISO 10816, 600 rpm). The device records the sensor signals according to the selected bandwidths and calculates the parameters. For each configuration, FAG Detector III compares the measured parameters with the main alarm limit values defined for this measurement location. If a

threshold value is exceeded, this is displayed directly on the device. For conspicuous parameters, the causes can be recognised from the demodulated and raw signal spectrum.

With the aid of trend analysis, the user can estimate when an alarm will probably occur. When an alarm is triggered, an alarm report can be automatically generated and printed out. In order to allow a comparison of values in the offline measurement it must be ensured that approximately equivalent conditions (load, speed etc.) are present. After reference measurement, measurements should be carried out at regular intervals.

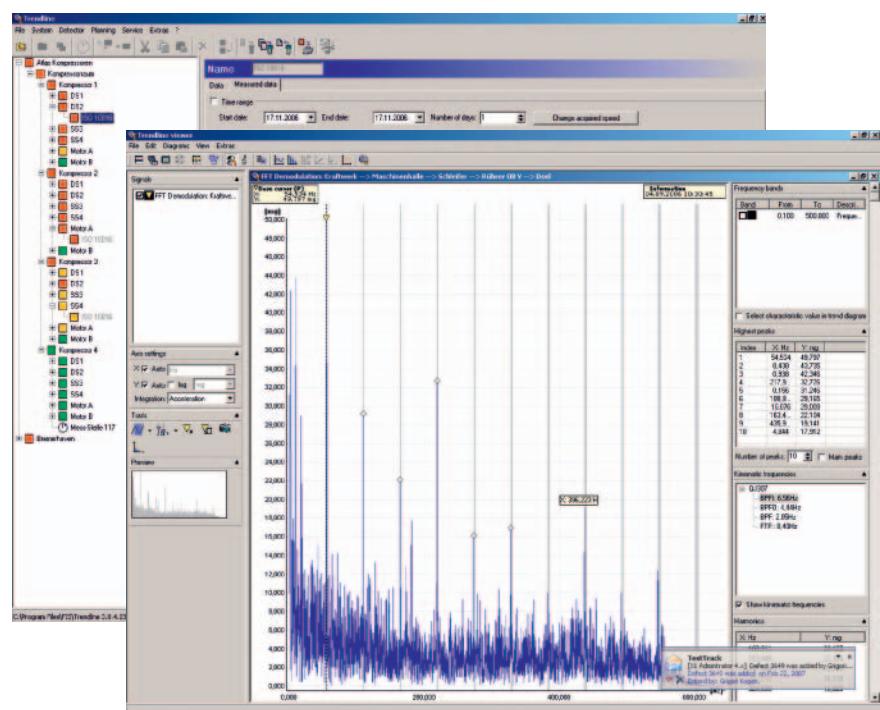

Presentation of measurement data in the Trendline software

Route planning · Bearing database

Route planning

The user can model the plant structure on a PC using the Trendline software. Within these configurations, routes can be defined, for example for individual days of the week or by machine type. Before measurement, the selected route is transferred to FAG Detector III. After a measurement round, all the recorded data are transferred to the Trendline software for evaluation, analysis and presentation by means of diagrams and tables.

Trendline bearing database

The integrated bearing database (containing approx. 20 000 bearings from various manufacturers) allows considerably simplified and shortened analysis of the measured data. In tandem with the F'IS Viewer, the bearing database offers a perfect combination for assessing machine

condition. Significant features can be recognised and allocated to the appropriate components at first sight. A separate bearing list can be filed for each measuring point. This offers the option of checking several bearing kinematic frequencies efficiently at one measuring point. The bearing database can be expanded individually by each user to include further entries.



F'IS Bearing database

Search bearing

Manufacturer: FAG

Group: alle

Search criteria: 720

Search results:

Bearing	Manufacturer
7200-B-2RS-TV/P	FAG
7200-B-JP	FAG
7200-B-TV/P	FAG
7201-B-2RS-TV/P	FAG
7201-B-JP	FAG
7201-B-TV/P	FAG
7202-B-2RS-TV/P	FAG
7202-B-JP	FAG
7202-B-TV/P	FAG
7203-B-2RS-TV/P	FAG
7203-B-JP	FAG
7203-B-TV/P	FAG
7204-B-2RS-TV/P	FAG
7204-B-JP	FAG
7204-B-TV/P	FAG
7205-B-2RS-TV/P	FAG
7205-B-JP	FAG
7205-B-TV/P	FAG
7206-B-2RS-TV/P	FAG
7206-B-JP	FAG

Geometry data or kinematic frequencies:
 Geometry Frequencies
 Settings in Hz Settings in RPM

Inner race: 5.9120

Outer race: 4.0860

Roller elements: 2.0301

Cage at fixed outer race: 0.4068

Cage at fixed inner race: 0.5912

Search result count: 63

Bearing database

RFID • Run-up/coast-down • Report

Automatic detection of measuring points – RFID

With the new, optional functionality of automatic measuring point detection*, recording of characteristic values using FAG Detector III is faster, simpler and more user-friendly. With the aid of RFID technology, the device automatically detects the measuring points if these are equipped with RFID tags and jumps to the corresponding point in the configuration. Measurement of the wrong assembly and erroneous allocation of measuring points are thus a thing of the past. The employee only needs to start and store measurement using FAG Detector III – no other action is required. Nothing could be simpler. The RFID technology can be easily retrofitted to existing FAG Detector III devices.

*This functionality is not yet available worldwide. Please direct any enquiries to: info@fis-services.com




Run-up/coast-down

Run-up/coast-down is used to determine resonance points. In a diagram (Bode plot), both the amplitude and the phase during run-up or coast-down are laid off over speed and presented in graphical form in the F'IS Viewer. The calculated resonance ranges can then be marked in the diagram and allocated to any balancing configuration. In the worst case, balancing in the resonance range can lead to machine damage.

Configurable report

A very useful feature of the Trendline software is the expanded report generator. This offers maintenance personnel in the company as well as external service providers using FAG Detector III the possibility of achieving seamless documentation of measurement results. The report generator makes it possible to prepare different reports matched specifically to individual customer requirements. All the information presented in the system can be used for the report, including time signals, trend curves and alarm data.

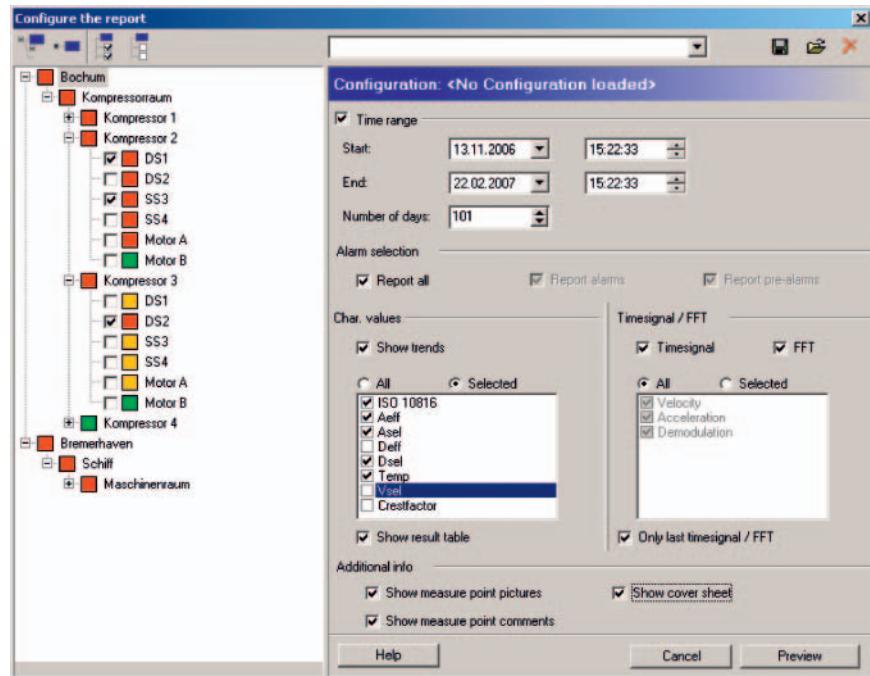

Report generation

Features • Ordering designation and scope of delivery

Operating benefits

- Complete package
- Static and dynamic balancing (1 and 2 planes)
- Monitoring functions:
 - ISO 10816
 - temperature
 - general vibration condition
 - rolling bearing condition
 - data collector for up to 1600 measuring points
 - storage of up to 300 time signals
- Portable, handy, easy to use diagnostic device
- Integrated database with approx. 20000 entries
- Operation with one hand using 21 keys
- Soft keyboard resistant to dust and spray water
- Headphone jack for acoustic noise assessment
- Storage and display of up to 4 characteristic values per measuring point for straightforward condition assessment
- RFID reader (retrofittable) for readout of RFID transponders
- Configurable report generator
- E-Mail service
- Free of charge PC software
- Sensor cable length up to 50 m



DETECT3.BALANCE-KIT

Ordering designation and scope of delivery

Detector III is available without and with automatic measuring point detection (RFID) (see remark, page 4). The Balancing Kit and accessories are equally suitable for both devices.

Ordering designation

DETECT3-KIT*

Scope of delivery:

- Basic device with rechargeable battery
- Acceleration sensor with magnetic foot
- Temperature sensor
- Charger
- PC data cable (serial/USB)
- User manual
- Protective bag with holder for temperature sensor
- PC software Trendline
- Case

Ordering designation

DETECT3-KIT-RFID**

Scope of delivery:

- As DETECT3-KIT
- RFID Reader (integrated in basic device)
- 5 RFID tags

Ordering designation for countries outside Europe
* FIS.DETECTORIII.KIT
** FIS.DETECTORIII.KIT.RFID
*** FIS.DETECTORIII.BALANCING.KIT



DETECT3-KIT

Ordering designation

DETECT3.BALANCE-KIT***

Scope of delivery:

- Acceleration sensor with magnetic foot and sensor cable
- Trigger sensor (optical and inductive)
- Balance
- Magnetic holder for trigger sensor
- Extension for magnetic holder
- Cable for trigger sensor (length 10 m)
- Reflex mark for trigger sensor
- Dongle for activation of balancing function
- Case

Accessories

- Sensor extension cables of lengths of 5 m and 15 m are available on request
- Further RFID tags are available on request

Selection of characteristic values

Selection of characteristic values				
Possible characteristic values and signal curves for each measuring point	Measurement range/resolution	Frequency range	Display	
Characteristic value: vibration velocity to ISO 10816 (VDI 2056) (broadband RMS value for vibration velocity) for general assessment of machine condition to ISO 10816	ISO 10816 0 to 5,52 m/s ³⁾ at 10 Hz 0 to 55,2 mm/s ³⁾ at 1 kHz	10 Hz to 1 kHz	Detector and PC	
Characteristic value: vibration velocity (freely selectable) (RMS value for vibration velocity, e.g. for detection of imbalance and misalignment)	V_{sel} 0 to 5,52 m/s ³⁾ at 10 Hz 0 to 55,2 mm/s ³⁾ at 1 kHz	Freely selectable up to set LP ¹⁾ (max. 20 kHz)	Detector and PC	
Characteristic value: acceleration (broadband RMS value for vibration acceleration, e.g. for monitoring of gearboxes)	A_{eff} 0 to 37 g ³⁾	2 kHz – up to set LP ¹⁾ (max. 20 kHz)	Detector and PC	
Characteristic value: acceleration (freely selectable) (e.g. for selective gear tooth monitoring)	A_{sel} 0 to 37 g ³⁾	Freely selectable up to set LP ¹⁾ (max. 20 kHz)	Detector and PC	
Characteristic value: demodulated signal (RMS value of demodulated signal up to 100/1000 Hz, e.g. for monitoring of rolling bearing condition)	D_{eff} 0 to 37 g ³⁾	Freely selectable up to set LP ¹⁾ (max. 20 kHz)	Detector and PC	
Characteristic value: demodulated signal (freely selectable) (e.g. for selective monitoring of rolling bearing condition)	D_{sel} 0 to 37 g ³⁾	Freely selectable up to set LP ¹⁾ (max. 20 kHz)	Detector and PC	
Time signal of vibration acceleration up to low-pass cut-off frequency, 4 096 or 8 192 values	±50 g ³⁾	0,1 Hz to 20 kHz ²⁾	PC	
Demodulated time signal up to set low-pass cut-off frequency, 4 096 or 8 192 values	±50 g ³⁾	0,1 Hz to 20 kHz ²⁾	PC	
Frequency spectrum (Fourier transform) of vibration velocity up to set low-pass cut-off frequencies	±5,52 m/s ^{3), resolution: LP · 2,56 / quantity of values⁴⁾ (0,0625 Hz to 12,5 Hz)}	0,3 Hz to 20 kHz ²⁾	PC	
Frequency spectrum (Fourier transform) of vibration velocity up to set low-pass cut-off frequencies	±50 g ^{3), resolution: LP · 2,56 / quantity of values⁴⁾ (0,0625 Hz to 12,5 Hz)}	0,1 Hz to 20 kHz ²⁾	PC	
Frequency spectrum (Fourier transform) of vibration velocity up to set low-pass cut-off frequencies	±25 g ^{3), resolution: LP · 2,56 / quantity of values⁴⁾ (0,0625 Hz to 12,5 Hz)}	0,1 Hz to 20 kHz ²⁾	PC	
Measuring point temperature	Temp = -20 °C to +550 °C	–	Detector and PC	
Crest factor	–	Calculation from time signal for acceleration (up to LP)	Detector and PC	
Speed	30 to 10 000 rpm	0,5 Hz to 166 Hz	Detector and PC	

¹⁾ LP = low-pass cut-off frequency (200, 500 Hz, 1, 2, 5, 10, 20 kHz)

²⁾ Lower limit frequency as a function of set low-pass cut-off frequency (lower limit frequency = LP/number of lines · 2,56)

³⁾ 100 mV/g sensor

⁴⁾ Quantity of values: 4 096 (at 1 600 FFT lines) or 8 192 (at 3 200 FFT lines)

On the PC, the user can specify for each measuring point whether and under what conditions certain time signals are to be stored. Three different time signals can be measured:

- 2 x vibration acceleration (0,1 Hz up to LP; sampling rate = 2,56 · LP; 0,1 Hz up to LP; sampling rate = 2,56 · LP). One is used to calculate the vibration spectrum.
- demodulated signal (0 Hz up to LP, sampling rate = 2,56 · LP).

Technical data

Data collection

Measurement ranges	Acceleration/vibration velocity 0,1 Hz to LP ¹⁾ 0,1 Hz to 200 Hz; 0,1 Hz to 500 Hz; ... Demodulated signal 0 Hz to LP ¹⁾ Low-pass cut-off frequencies 200, 500 Hz, 1, 2, 5, 10, 20 kHz High-pass (demodulated signal branch) 750 Hz Temperature -20 °C to +550 °C (temperature range as a function of sensor used, freely configurable input)
Characteristic values	A_{eff} (2 kHz to LP ¹⁾), RMS value for vibration acceleration A_{sel} RMS value for vibration acceleration in freely definable frequency range ISO 10816 (10 kHz to 1 kHz), RMS value for vibration velocity V_{sel} RMS value for vibration velocity in freely definable frequency range (frequency band as a function of LP ¹⁾) D_{eff} RMS value for demodulated signal D_{sel} RMS value for demodulated signal in freely definable frequency range Crest factor, speed, temperature
Window function	Hanning
Averaging in frequency range	1–9 (FFT, characteristic values per channel) Linear
Sampling rate	Max. 51,2 kHz, as a function of set LP ¹⁾
A/D converter	16 bit (autoranging), dynamic range >90 db
Frequency resolution	1600, 3 200 lines (0,0625 Hz to 12,5 Hz as a function of set LP ¹⁾)
Automatic measuring point detection	RFID 13,56 MHz, ISO 15693, compatible with RFID tags of stated specification
Run-up/coast-down	Configurable (1 024, 2 048 and 4 096 measuring points) Automatic start and stop function
Inputs	2 × BNC connectors (multiplexer) ICP (4,7 mA), steplessly adjustable sensitivity, sensor tester AC/DC ±5V, impedance >100 kΩ 1 × AUX Tachometer input 5 to 24V, <10 000 rpm (rising or falling edge selectable) IR temperature sensor ±5V, impedance >100 kΩ (freely configurable) Battery charger
Outputs	Headphone (demodulated signal) RS 232 for data transmission (38,4 kps, 57,6 kps) AUX: supply for trigger sensor (5 V max. 200 mA, 12 V max. 50 mA)

¹⁾ LP = low-pass cut-off frequency

Technical data

Balancing

1 or 2 plane balancing
up to 4 sensor positions
Weight positions:
Continuous (0 to 359°) or discrete (4 to 99 positions)
Removal of weights: yes/no

Balancing measurement type

Acceleration, velocity, displacement

Measurement

Peak, peak-to-peak, RMS

Balance units

g, mm/s, inch/s, µm, mil

Weight units

gr., oz. (up to 9 999,99 gr. or oz.)

General

Separate measurements

Temperature, speed, headphone (demodulated signal)

Keyboard

Soft keyboard with 21 keys

Display

Illuminated graphic display (LCD), 128 × 64 pixels, 55 mm × 33 mm

Memory

1 600 measuring points plus 270 time signals (maximum 300 time signals)

Power supply

NiMh 1650 mAh, voltage 6 V

Dimensions and mass

230 × 70(53) × 45(53) mm (L × B × H), approx. 500 g (including battery)

Temperature range

0 °C to 50 °C (working temperature)

Operating time

Approx. 6 to 8 hours continuous operation

Housing

ABS, IP 40

Protective bag

Two compartments, black nylon, carry strap

EMC standards

ETSI EN 301 489, ETSI EN 300 330, EN61000-6-2, EN61000-6-4, EN60950-1, FCC Part 15

Firmware

Free of charge firmware updates on Internet

Available languages:

German, English, Finnish, French, Italian, Dutch, Portuguese, Swedish, Slovenian, Spanish and Turkish

Software

Trendline (updates on Internet)

Suitable for Windows 2000/XP/Vista

Available in: German, English, French, Portuguese and Spanish

- configuration of FAG Detector III via RS 232 interface
- bearing database of approx. 20 000 bearings
- graphic presentation of characteristic values and curve
- trend analysis
- presentation of time signals and FFT
- display of balancing in tabular and graphical format
- configurable report generator

Everything from a single source – Customised monitoring solutions for everyone

Everything from a single source – customised monitoring solutions for everyone

FAG Industrial Services (F'IS) is a full service supplier in the field of condition-based maintenance. With the sourcing of high quality F'IS products, the customer thus gains access to a range of product-related services (see diagram).

Based on many years' experience, F'IS knows that customers wishing to change to the concept of continuous condition monitoring have differing needs and

requirements. Therefore, F'IS has a comprehensive portfolio of products and services containing both standard and customer-specific solutions that are always developed in close partnership with the customer.

The F'IS service portfolio for continuous condition monitoring covers the following areas:

- consultancy
- installation
- initial operation
- system support
- continuous and regular measurement

It is of course the customer who decides which of the available services he wishes to use. For example, he can choose complete monitoring of his plant by F'IS or to have his employees qualified for independent monitoring at their own responsibility through training. Whichever service is selected, the team of F'IS experts is available at any time. If you have any further questions on our services, please contact us directly or visit our website.



E-mail service
for analysis of
measurement
data
(transfer to
F'IS experts
by automated
data export)

E-service



Support hotline



Training



**Free
software updates**

Schaeffler KG

Postfach 1260

97419 Schweinfurt (Germany)

Georg-Schäfer-Strasse 30

97421 Schweinfurt (Germany)

Service Hotline:

Phone +49 2407 9149-99

Fax +49 2407 9149-59

E-Mail info@fis-services.com

Internet www.fis-services.com

Every care has been taken to ensure the correctness of the information contained in this publication but no liability can be accepted for any errors or omissions.

We reserve the right to make technical changes.

© Schaeffler KG · 2007, December

This publication or parts thereof may not be reproduced without our permission.

TPI WL 80-64/2 EA